

CERTIFIED LAND CORNER RECORDATION


DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (if known)

LOCATION Found 2 3/4" dia. iron pipe with brass cap (G.L.O. record monument),
 15" below road surface.
 CC S.26
 S.35 G.L.O. record - Set an iron post 3 ft. long, 2 3/4 ins. diam., 26 ins.
 T.18N.,R.60W. in the ground, surmounted by brass cap, marked T. 18 N.,
 6th P.M. R. 60 W., S. 26 on N. W.; S. 35 on S. W.; WYO on W.
 and NEB on E., May 28, 1908.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
 TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner: Monument found in good condition.
 Accessories: R.P. No. 1 - A 5/8" dia. x 24" long rebar with Surv KAP bears N 54° E
 (mag.), 48.15 feet distant.
 R.P. No. 2 - A 5/8" dia. x 24" long rebar with Surv KAP bears S 60 1/2° E
 (mag.), 45.27 feet distant.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)

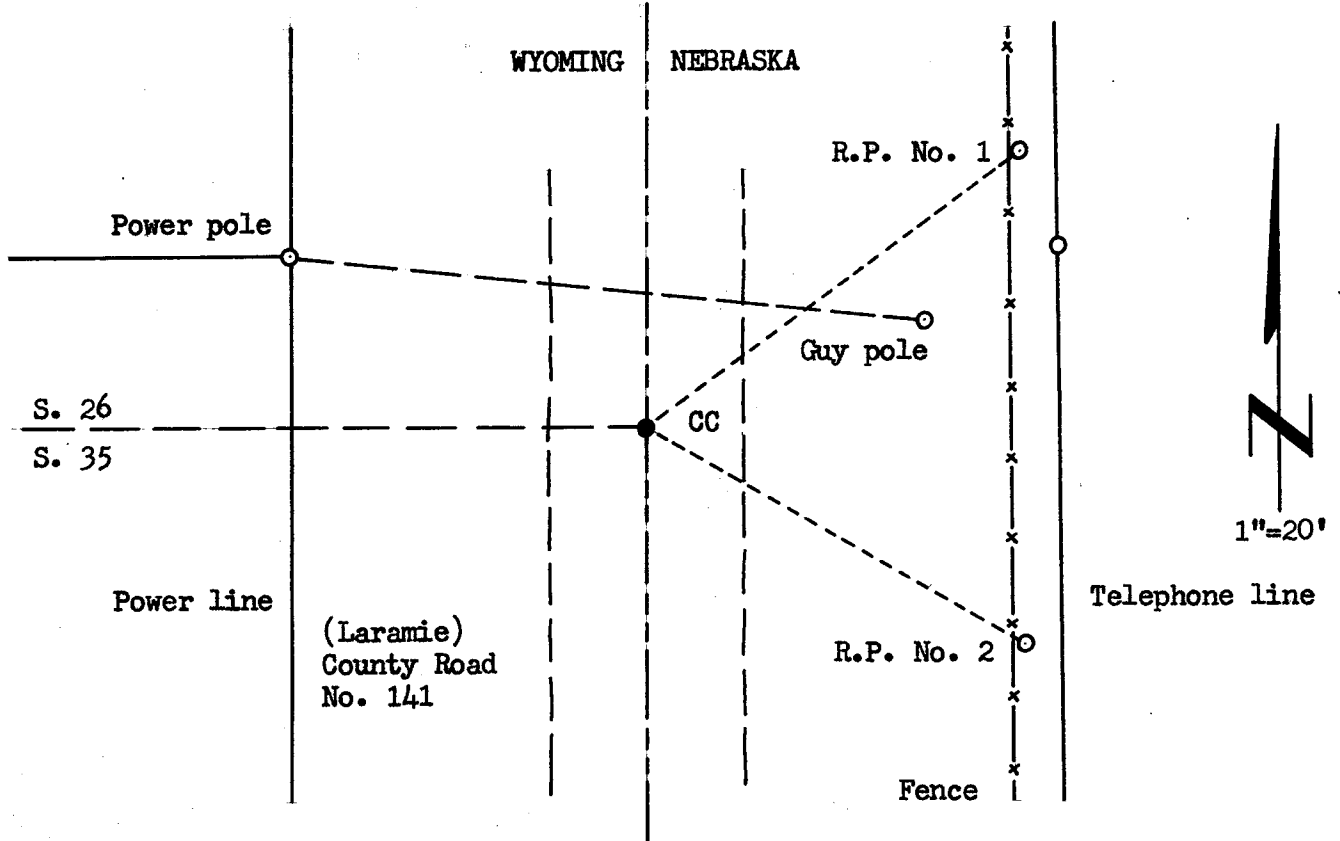

I, R.L. Hudson certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

R.L. Hudson Wyoming L.S. No. 519
 Signature of Surveyor Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Laramie

This "corner record" was filed for record on the 18th day of September, 1972, was noted on the cross-index plat and is assigned page No. 18-60, in book No. ONE.

John A. Johnson
 County Clerk

Cross Index No. _____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____
_____	T. _____	R. _____	Mer. _____

The State of Wyoming }
County of Laramie } ss

This instrument was filed for record
at 1:30 o'clock P.M. on the
18th day of September
A. D. 19 22 and duly recorded in
Book on page

John B. Stillman

County Clerk & Ex-Officio Register of Deeds
By _____ Deputy