State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33—29—140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

RECORD:

SET A SANDSTONE 16" X 12" X 4", 10" DEEP MARKED 1/4 ON NORTH SIDE FOR 1/4 SECTION CORNER.

MONUMENT FOUND:


NOTHING FOUND.

MONUMENT SET:

SET A 5/8" X 24" REBAR WITH A 3 1/4" ALUMINUM CAP PROJECTING 0.4' ABOVE THE GROUND SURFACE WITH THE CAP AS SHOWN.

REFERENCES:

MONUMENT LIES 7' NORTH OF A E-W BARBED WIRE FENCE AND 10' SOUTH OF A E-W TWO TRACK TRAIL ROAD. SET MAG NAILS FOR REFERENCE. MONUMENT WAS SET BY SINGLE PROPORTION.

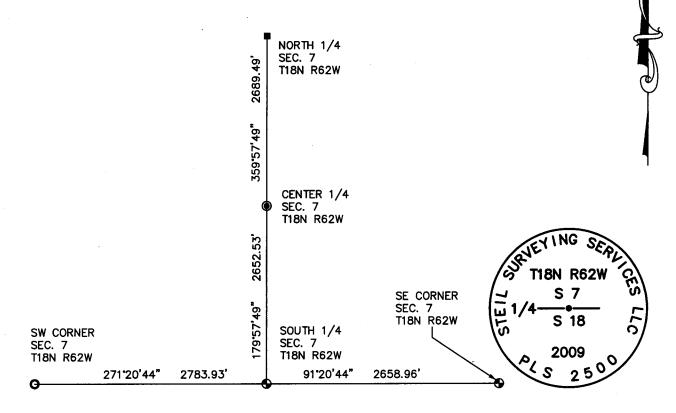


Date of Field Work: 11/30/09

Office Reference: <u>09305</u>

Monument Inscripition

Cross Index Plat

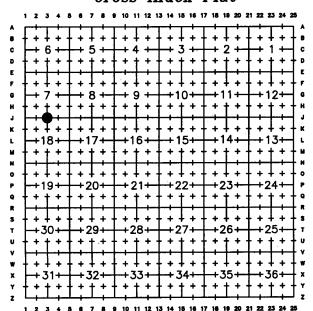


Firm/Agency, Address

STEIL SURVEYING SERVICES LLC

Telephone Number: (307) 634-7273

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



Corner Name SOUTH 1/4 Section 7, T 18 N, R 62 W, 6th P.M.

County: LARAMIE Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998

Cross-Index No.: <u>J-3</u>