

062634

RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

Northwest corner Section 30 T18N R65W

CERTIFIED LAND CORNER RECORDATION

'89 OCT 5 PM 3 01

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


No evidence of the original GLO stone was found. Found a good North South fence and an old East West fence at the location of the corner. Measurements to other evidence in the area indicate the fence corner to be the Section corner. Called the corner obliterated and reset at the existing fence corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Set a No 5 rebar with a Corps of Engineers Brass Cap for the corner.
Set flush and raise a mound of stone. Tied to the fence as shown in the sketch.

Aug 25 1989

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
(May Sketch or Paste Reproduction on Reverse Side.)

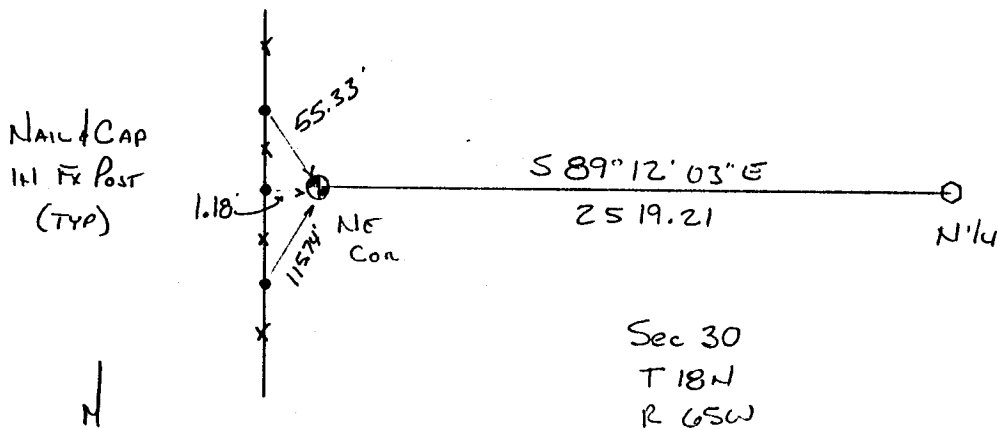

Sec 30
T 18N
R 65W

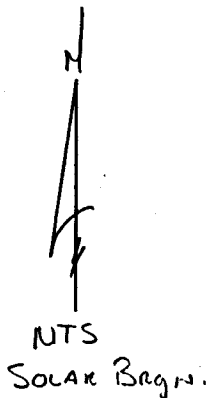

I, Wallace C. Muscott certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Wallace C. Muscott
Signature of Surveyor

3830
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

County Official			
Cross Index No.	R 1	T. 18N	R. 65W 6th Mer.
	R 25	T. 18N	R. 66W 6th Mer.
		T. _____	R. _____ Mer.
		T. _____	R. _____ Mer.
		T. _____	R. _____ Mer.
		T. _____	R. _____ Mer.
		T. _____	R. _____ Mer.