C46855
RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

CERTIFIED LAND CORNER RECORDATION '88 JUL 20 API 11 30

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known) Found no evidence of previous monumentation.

S.16 S.21 T.18N., R.67W. 6th P.M.

G.L.O. Record: Set sandstone 16"x12"x6".

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

At the corner:

Set 5/8"x18" long rebar w/2" aluminum cap at proportinate distance


encircled by a collar of stone.

Accessories:

See ties below.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.

(May Sketch or Paste Reproduction on Reverse Side.)

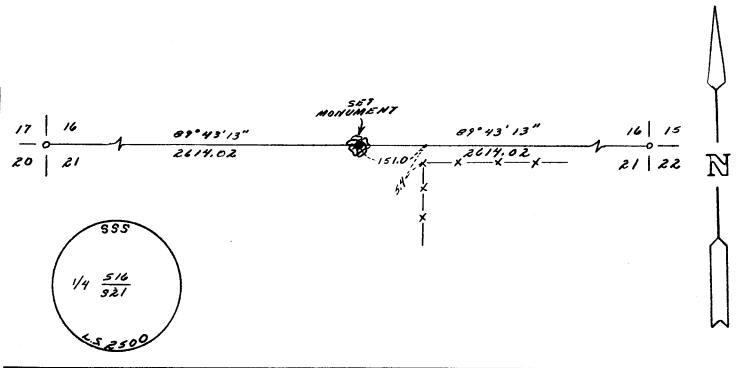

I, <u>John A. Steil</u> certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Sol A. Stil

L.S. 2500

Signature of Surveyor

Registration No.

STATE OF WYOMING,

Office of Clerk and Recorder,

County of Alsamel

This "corner record" was filed for record on the day of on the cross-index plat and is assigned page No._____, in book No.____

Janet C Whithers

	Count	y Official			
Cross Index	N-11 T	18N	R.	67W	Mer. 6th
	T.		R.		Mer.
	T.		R.		Mer.
	T.		R.		Mer.
	T,		R.		Mer.
	-		_		A A