

**State of Wyoming Corner Record**

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

**G.L.O. Record:** 40.00 Chains      Set a granite boulder 20 x 8 x 6 for 1/4 Sec. Cor. John B. Thomas, U.S. Deputy Surveyor, June 5, 1872.

**Found:**      A firmly set 8" x 4" x 6" out of the ground, granite type stone with a 1/4 marked on the SE face.


**Set:** Nothing

See Map of Survey to be Filed in Laramie County Courthouse for measurements to other found corners in the area.

2222997  
LARAMIE COUNTY CLERK  
CHEYENNE, WY.  
98 APR 20 AM 9 28

Date of Field Work: April 10, 1998      Office Reference: A.V.I. JOB NO. 2-2066.98


**CROSS INDEX DIAGRAM**

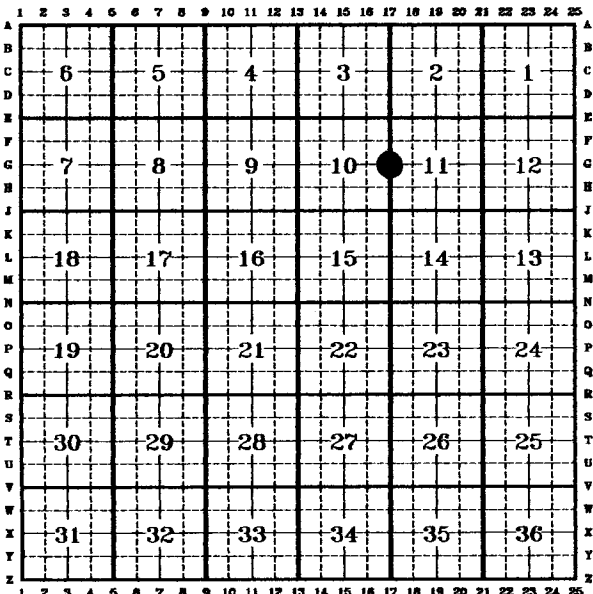

**Firm/Agency, Address**

Paul A. Reid, A.V.I.p.c.  
2035 Westland Road  
Cheyenne, WY 82001  
Telephone Number:  
(307)-637-6017

This corner record was prepared by me or under my direction and supervision.

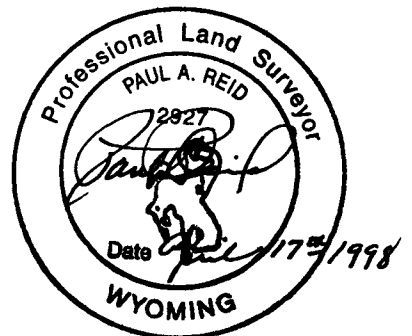

Corner Name: W1/4 COR.      Section: 11      T 18N.      R 70W.6th      P.M.      Cross-Index No.: G-17