

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: 80.00 Chains A granite boulder 20 x 15 x 7 for Cor to Sec's 10, 11, 14 & 15 John B. Thomas, U.S. Deputy Surveyor, June 5, 1872.

Found: 11" x 6" x 8" out of the ground, granite type stone with 4 visible notches on the south and 2 visible notches on the East edges. Stone was 2' west of an existing N/S fence line and in a small mound of stones.


Set: Nothing

See Map of Survey to be filed in Laramie County Clerk's office for measurements to other found corners in the area.

2222998
LARAMIE COUNTY CLERK
CHEYENNE, WY.
98 APR 20 AM 9 28

Date of Field Work: April 10, 1998 Office Reference: Job No. 2-2066.98

CROSS INDEX DIAGRAM

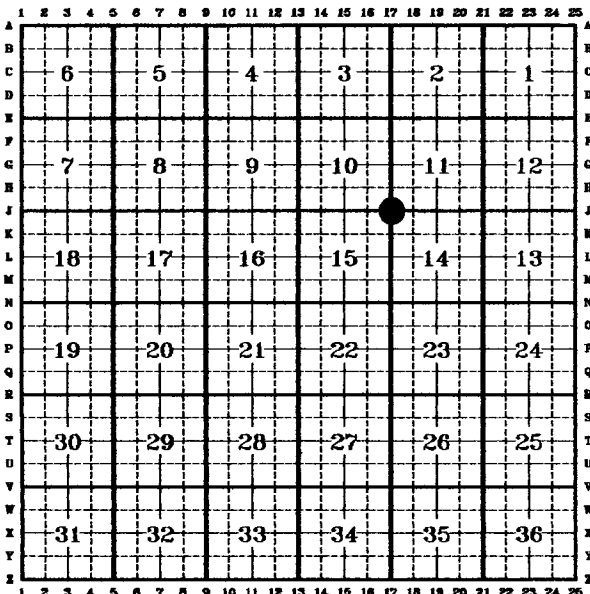

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001
Telephone Number: (307)-637-6017

This corner record was prepared by me or under my direction and supervision.



Corner Name: NW Cor. Section: 14 T 18N R 70W; 6TH P.M. Cross-Index No.: J-17