
State of Wyoming Corner Record

(in compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Land Surveyors.)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historic information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

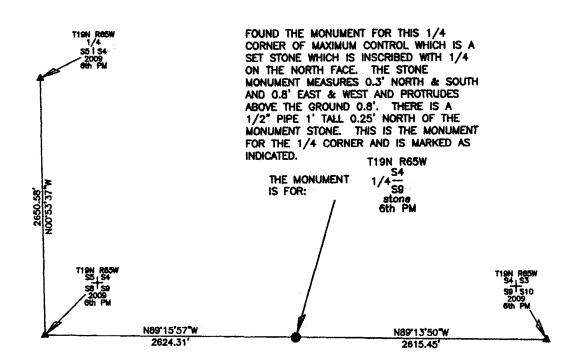

THE MONUMENT FOR THIS 1/4 CORNER IS A SET MARKED STONE WHICH MEASURES 0.8' EAST & WEST BY 0.3' NORTH & SOUTH AND PROTRUDES ABOVE THE GROUND 0.8'. THERE IS 1/4 ON THE NORTH FACE.

Marking on the Stone


CORNER MONUMENT SYMBOLS

- RECORD IS FOR THIS CORNER MONUMENT.
- A RELATED CORNER OR WC MONUMENT.

SCALE 1"=1000'
(EXCEPT IN
TRIVIAL CASES)
BEARINGS ARE RELATED
TO WGS 84 WITH
GPS OBSERVATIONS
DRAWN BY: NJM
P.C. J. FLOYD

COUNTY: LARAMIE

Date of Field Work: 04/19/2009 Office Reference:



Firm/Agency, Address
UELS, LLC

85 South 200 East

Vernal, Utah 84078

Telephone Number: 435-789-1017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



RECORDED 6/22/2009 AT 12:06 PM REC# 525081 3K# 2118 PG# 879
DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

1\4 CORNER OF MAXIMUM CONTROL

Corner Name: NORTH 1/4 CORNER OF SECTION 9 Section: 9 T 19N R 65W; 6TH P.M. Cross Index No.: E-11

SBRPEPLS/PLSW: March 1994 (CLCR...SJA)