

CERTIFIED LAND CORNER RECORDATION

LOCATION

43
910
 T 19 N, R 66 W
 6th P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)

Found limestone broken in several pieces, base still set.
 Could see definated grooves, but not all of them. Overall demensions
 of stone 12" x 4" x 18".
 G.L.O. record - limestone 20" x 15" x 6".


DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Replaced stone with # 5 rebar, 18" long, with surv-cap.
 Set 1/2" pipe on section line to west and 1/2" pipe south, southeast for witness corners. (See sketch).

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY.
 (May Sketch or Paste Reproduction on Reverse Side.)



No bearings determined.

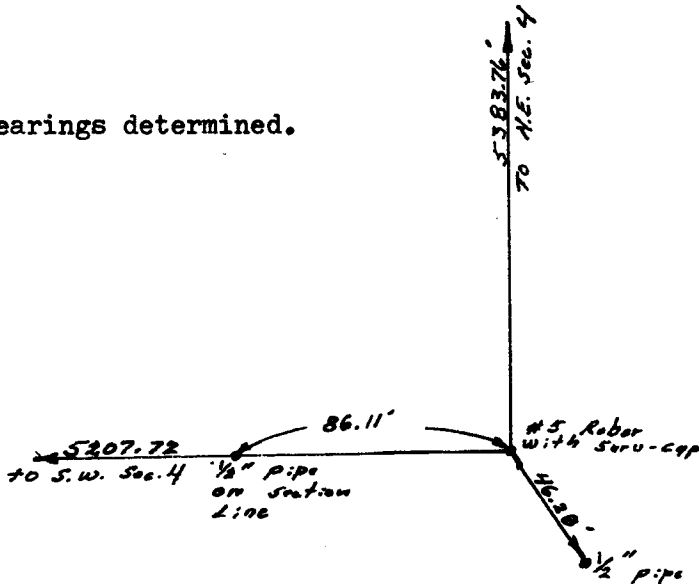

I, Robert C. Corbet certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert C. Corbet
 Signature of Surveyor

L.S. 495
 Registration No.

STATE OF WYOMING,
 Office of Clerk and Recorder,
 County of Terrance

This "corner record" was filed for record on the 6 day of January, 1975, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

James C. Whitehead
 County Official

Cross Index No. <u>E13</u>	T. <u>19</u>	R. <u>66</u>	<u>6</u> Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Photographed *W*
 Indexed *W*
 Posted *SP*
 Assessor *V*

The State of Wyoming
 County of Laramie

This instrument was filed for record
 at 125 o'clock P. M. on the
6 day of January
 A. D. 1921 and duly recorded in
 Book _____ on page _____

James C. Mitchell

County Clerk & Ex-Officio Registrar of Deeds
 Deputy

1000