


# Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

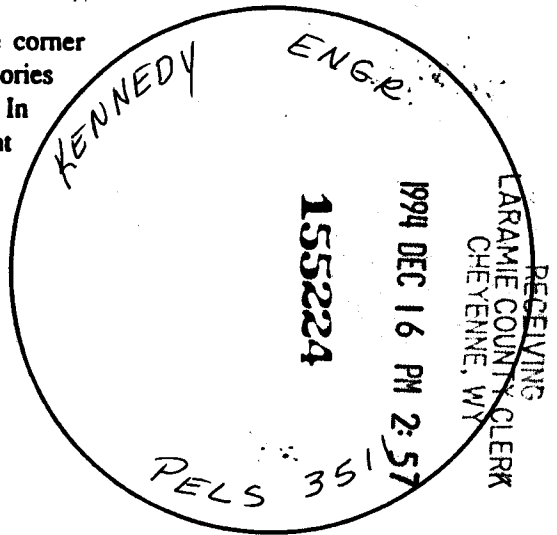

Field Date 11/07/94 Office Reference \_\_\_\_\_

V. [unclear] [unclear]

### Monument Inscription

FOUND FLAT RED SANDSTONE, SET APPROX 8" IN GROUND. SET 1/2" X 2' REBAR W/AL. CAP, KENNEDY ENGR., PELS 3511 AT THE EAST 1/4 CORNER OF SECTION 15, T19N, R68W OF THE 6th P.M., LARAMIE County, Wyoming. SEE SHEET 3 OF 3

State of Wyoming  
Office of County Clerk  
County of LARAMIE

This Certified Land Corner Recordation Certificate was filed for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19 \_\_, in Book No. T \_\_\_\_\_, R \_\_\_\_\_, on Alpha-Numeric coordinates \_\_\_\_\_ and was noted on the Cross Index Plat.

*Janet C. Whithead*  
County Clerk


Corner Type:  Aliquot Corner  Other  
Section(s) 15, 14 Meridian 6th P.M.  
Corner Name L17 Township 19N Range 68W Page \_\_\_\_\_  
Sheet 1 of 3

### Directions for using the Cross Index Plat

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

### Cross Index Plat

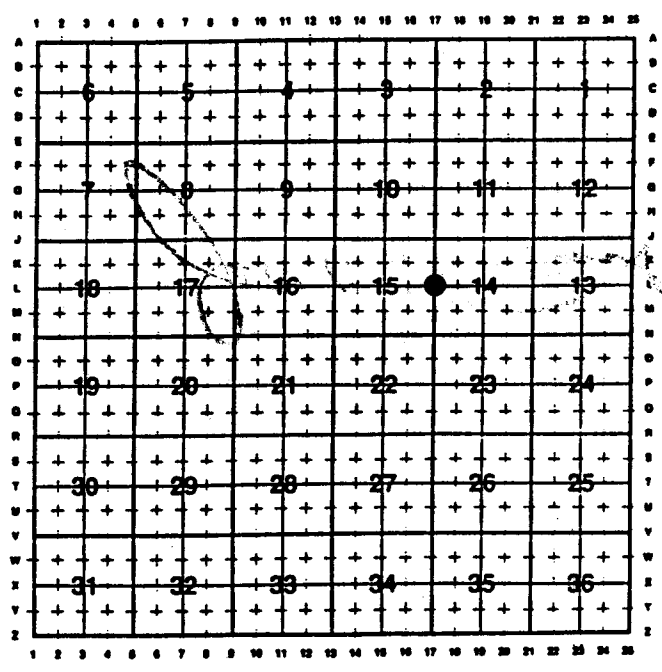

### State Plane Coordinates (optional)

Zone            W    WC    EC    E            feet/meters

NAD 1927             NGVD 1929             NAD 1983             NAVD 1988

North (Y) = \_\_\_\_\_            East (X) = \_\_\_\_\_            EL = \_\_\_\_\_

Latitude \_\_\_\_\_            Longitude \_\_\_\_\_

Scale Factor \_\_\_\_\_            Geoid Height \_\_\_\_\_

### Certification

I, RUSSELL D. SCHAMEL, Wyoming PLS-PE 3511 certify that I, or others under my supervision, have performed the work as described above and completed this form.


Company or Agency KENNEDY ENGINEERING

Mailing Address P.O. BOX 1089

Street Address 602, 9th STREET #4

City, State, ZIP WHEATLAND, WYO. 82201

Telephone, FAX 307-322-9789    322-9128

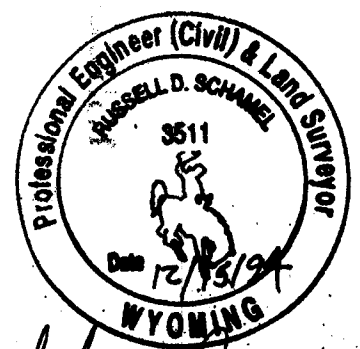

Russell D. Schamel  
Signature, Seal, and Date

R68 W

N 88° 45' 34" W

GREY GRANITE STONE

2656.23'

GREY GRANITE STONE

NOTE: BEARINGS ARE RELATIVE TO ASTRONOMIC NORTH AS DETERMINED BY S.O. TAKEN 1/4 MILE WEST OF SE. COR. SEC. 15.

5284.33'

N 00° 02' 38" E

16

N 89° 17' 55" W

MARKED STONE IN E-W FENCE LINE

2669.57'

N 00° 06' 21" W

5259.51'

N 88° 49' 41" W

GRANITE STONE AT FENCE CORNER

2628.86'

15

N 88° 51' 27" W

FLAT RED SANDSTONE IN FENCE

2634.33'

FLAT RED SANDSTONE ROCK

N 00° 26' 35" W 2637.5'

T 19 N

1" BRASS CAP ON 5/8" BAR

