


1389

Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

Field Date 10/07/94 Office Reference _____

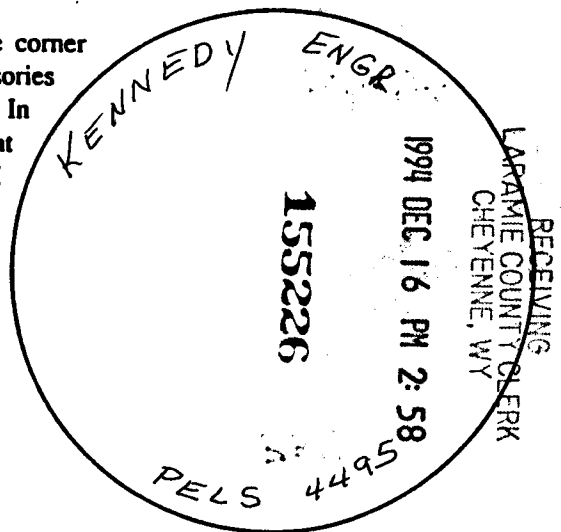

Monument Inscription

FOUND FLAT RED SANDSTONE STONE IN E-W FENCE LINE, SET 1/2" X 2' REBAR W/AL. CAP, MARKED KENNEDY ENGR., P.E.L.S. 4495. AT THE SOUTH 1/4 CORNER OF SECTION 15, T19N, R68W. OF THE 6th P.M., LARAMIE County, Wyo. SEE SHEET 3 OF 3

State of Wyoming
Office of County Clerk
County of LARAMIE

This Certified Land Corner Recordation Certificate was filed for record on the _____ day of _____, 19 __, in Book No. T _____, R _____, on Alpha-Numeric coordinates _____ and was noted on the Cross Index Plat.

Janet C. Whitehead
County Clerk

Corner Type: Aliquot Corner Other
Section(s) 15 Meridian 6th P.M.
Corner Name N 15 Township 19 N Range 68 W Page 1
Sheet 1 of 3

BOOK 1389

1084

BOOK 1389


1085

Directions for using the Cross Index Plat

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

Cross Index Plat

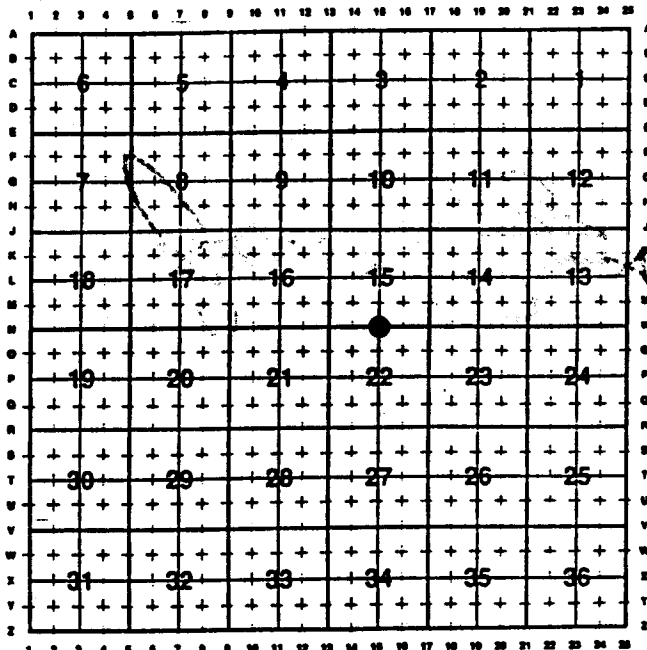

State Plane Coordinates (optional)

Zone W WC EC E feet/meters

NAD 1927 NGVD 1929 NAD 1983 NAVD 1988

North (Y) = _____ East (X) = _____ EL = _____

Latitude _____ Longitude _____

Scale Factor _____ Geoid Height _____

Certification

I, RUSSELL D. SCHAMEL, Wyoming PLS-PE 3511 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency KENNEDY ENGINEERING

Mailing Address 1089 P.O. BOX

Street Address 608, 9th STREET # 4

City, State, ZIP WHEATLAND, WYO. 82201

Telephone, FAX 307-322-9789, 322-9128



Russell D. Schamel

Signature, Seal, and Date

N 88° 45' 34" W

GRAY GRANITE STONE

2656.23'

GRAY GRANITE STONE

NOTE: BEARINGS ARE RELATIVE TO ASTRONOMIC NORTH AS DETERMINED BY S.O. TAKEN 1/4 MI. WEST OF THE SE. COR., SEC. 15

5284.33'

16

N 00° 02' 38" E

N 89° 17' 55" W

MARKED STONE IN E-W FENCE LINE

2669.57'

N 00° 06' 21" W

5259.51'

N 88° 49' 41" W

GRANITE STONE AT FENCE CORNER

2628.86'

15

N 88° 51' 27" W

FLAT RED SANDSTONE IN FENCE

2634.33'

FLAT RED SANDSTONE Rock

N 00° 26' 35" W 2637.5'

T 19 N

1" BRASS CAP ON 3/8" BAR

SHEET 3 OF 3

R 68 W

