

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: 80.00 Chains A granite 16 x 10 x 8 set 10 in. deep marked with 3 notches on S. side and 3 notches on E. side for cor to sec's 15,16,21,22. John B. Thomas, U.S. Deputy Surveyor, August, 1874.

Found: 7" x 8" x 9" out of the ground, pink colored quartz stone with 3 notches on the south edge and 2 visible notches on the east edge.

Set: Raised a small mound of stone east of the found monument.

See Map of Survey to be filed in Laramie County Clerk's office for measurements to other found corners in the area.


223001

LARAMIE COUNTY CLERK
CHEYENNE, WY.

'98 APR 20 AM 9 28

Date of Field Work: March 13, 1998 Office Reference: Job No. 2-2066.98


CROSS INDEX DIAGRAM

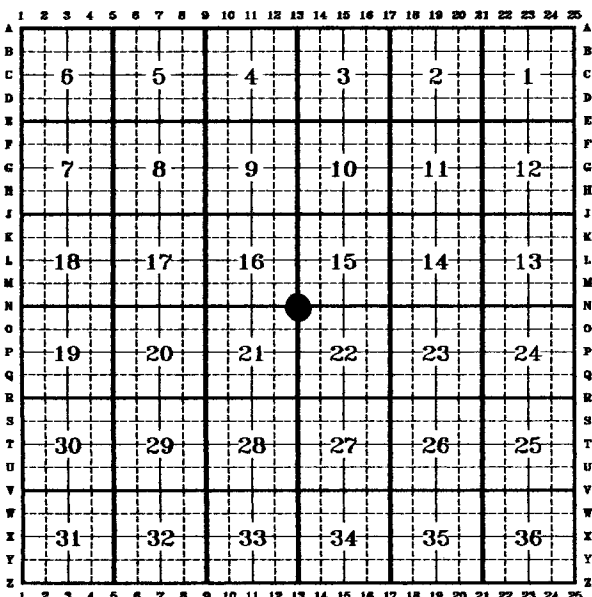

Firm/Agency, Address

Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001
Telephone Number:
(307)-637-6017

This corner record was prepared by me or under my direction and supervision.

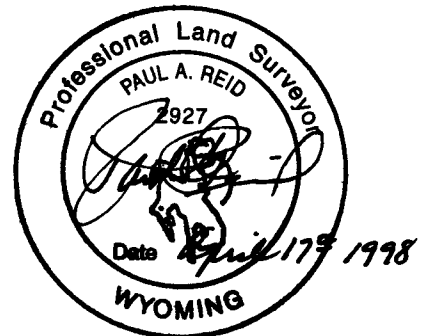

Corner Name: NW Corner Section: 22 T 19N R 70W; 6TH P.M. Cross-Index No.: N-13