


CERTIFIED LAND CORNER RECORDATION

T 19N, R 70W



DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)


Found grayish stone 12" x 6" standing 8" above ground with weak 1/4 in north face. Original Monument described as a sandstone 18" x 12" x 9" set 12" deep with 1/4 mark on north side.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set a No. 5 Rebar with Aluminum Cap as corner monument. Set at north face of stone which was left in place as a reference monument.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

Sec. 13, T 19N, R 70W

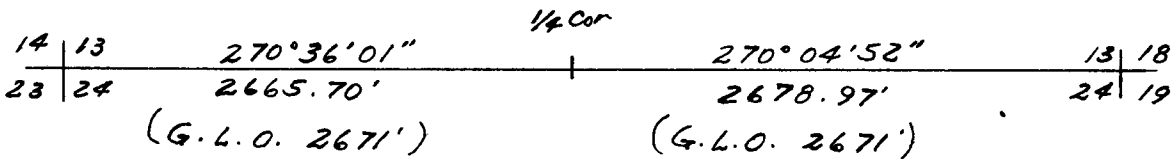

Sec. 24

I, Edward C. Fry certify that I have carefully performed ~~or reviewed~~ the work done on the diagrammed corner as reported on this recordation form and approve the same.

Edward C. Fry
Signature of Surveyor

P.E./L.S. 662
Registration No.

STATE OF WYOMING,
Office of Clerk and Recorder,
County of _____

594255

This "corner record" was filed for record on the 0CT 2 day of 1980, 19____, was noted on the cross-index plat and is assigned page No._____, in book No._____.

James C. Whitehead
County Official

	Cross Index No.	T. _____	R. _____	Mer. _____
Photographed.....	<u>N-23</u>	T. <u>19</u>	R. <u>70</u>	Mer. _____
Indexed.....	_____	T. _____	R. _____	Mer. _____
Posted.....	_____	T. _____	R. _____	Mer. _____
Assessor.....	_____	T. _____	R. _____	Mer. _____

N-23 19-70