

State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: 80.00 Chains

A sandstone 16 x 12 x 5 set 11 in. deep marked with 2 notches on S. side and 3 notches on E. side for cor. to sec's 21,22,27 and 28.
John B. Thomas, U.S. Deputy Surveyor,
August, 1874.


Found: A well set 15" x 3" x 7" out of the ground, pink colored stone oriented in a east west direction. Stone was marked with 2 notches on the south and 3 notches on the east edges and approximately 5' south of a fence corner post of fences extending west and north.

See Map of Survey to be filed in Laramie County Clerk's office for measurements to other found corners in the area.

223003
LARAMIE COUNTY CLERK
CHEYENNE, WY.
98 APR 20 AM 9 29


Date of Field Work: Feb. 27, 1998 Office Reference: Job No. 2-2066.98

CROSS INDEX DIAGRAM

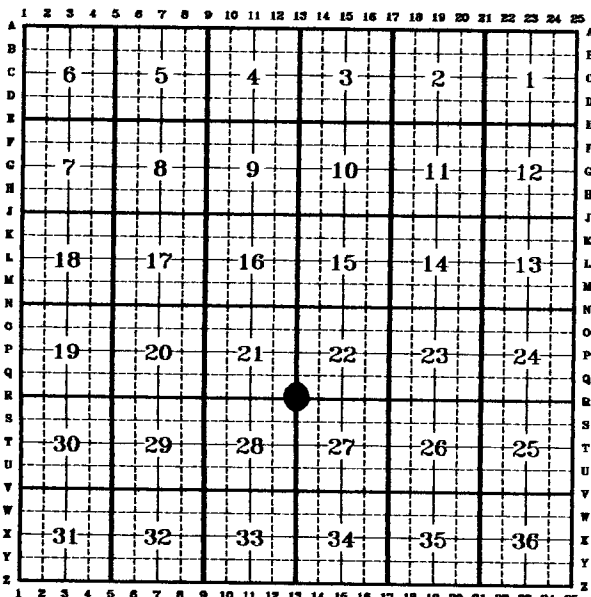

Firm/Agency, Address
Paul A. Reid, A.V.I.p.c.
2035 Westland Road
Cheyenne, WY 82001
Telephone Number:
(307)-637-6017

This corner record was prepared by me or under my direction and supervision.

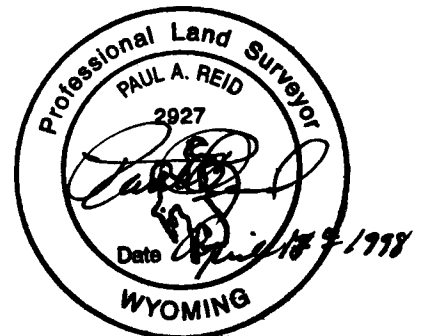

Corner Name: NW Cor. Section: 27 T 19N R 70W; 6TH P.M. Cross-Index No.: R-13