


State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.




MONUMENT INSCRIPTION

N 89°32'42" W - 2633.30'

TO SW COR SEC 30

S 89°32'42" E - 2639.90'

TO SE COR SEC 30



S1/4 SEC 30, ORIGINAL 16"x12"x4" RED SANDSTONE SET BY J. WESLEY HAMMOND IN 1871, OBLITERATED. CORNER REMONUMENTED WITH A P-K NAIL WITH SPOTTER DISK MARKED PLS 3891

NO SIGNIFICANT EVIDENCE FOUND - SET CORNER AT G.L.O. PROPORIONATE DISTANCE, ON LINE, BETWEEN SOUTHEAST AND SOUTHWEST CORNERS OF SECTION 30.

226367

LARAMIE COUNTY CLERK
CHEYENNE, WY.

98 JUN 3 AM 9 05

SCALE: 1" = 100'

Date of Field Work: NOVEMBER, 1996

Office Reference: V-031460.dwg

CROSS INDEX DIAGRAM


	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25
A																									
B																									
C		6				5					4					3						2			1
D																									
E																									
F																									
G			7				8				9					10						11			12
H																									
J																									
K																									
L				18				17					16				15						14		13
M																									
N																									
O																									
P						19			20				21				22					23			24
Q																									
R																									
S																									
T																									
U																									
V																									
W																									
X																									
Y																									
Z																									

Firm / Agency, Address

Eastern Wyoming Engineering
& Surveying Professionals
2510 West "C" Street • P.O. Box 99
Torrington, WY 82240
Phone Number: (307) 532-3811

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

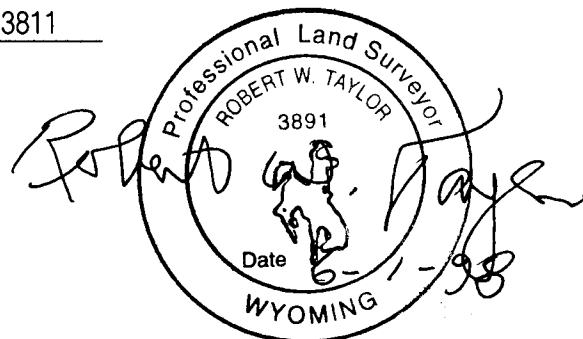

Corner Name: S1/4 CORNER
SBRPEPLS/PLSW: March 1994

Section: 30 T14N R60W ; 6th P.M. Cross-Index No.: V-03