

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Notes: U.S. Deputy Surveyor, John B. Thomas, September 15, 1870; 40.00 Chains... Set Granite Boulder 16 x 8 x 4 for 1/4 Sec Cor.

Found: A set, marked, 8" x 12" x 5" granite stone in a North/South fenceline. Stone was marked with 1/ (backwards 4) on the West face.

Set: No. 6 x 48" rebar with 3 1/4" aluminum cap, 43" in the ground. Buried the original stone as a memorial along the west side.

See back of this sheet for ties to adjacent monuments.


Aluminum Cap Markings

T.15N. R.67W.
 S14 | S13
 1
 4
 1996
 PLS 2927

178475
 LARAMIE COUNTY CLERK
 CHEYENNE, WY.
 '96 MAR 1 PM 12 14

Date of Field Work: 30, Jan., 1996 Office Reference: Job No. 2-1930.95

CROSS INDEX DIAGRAM

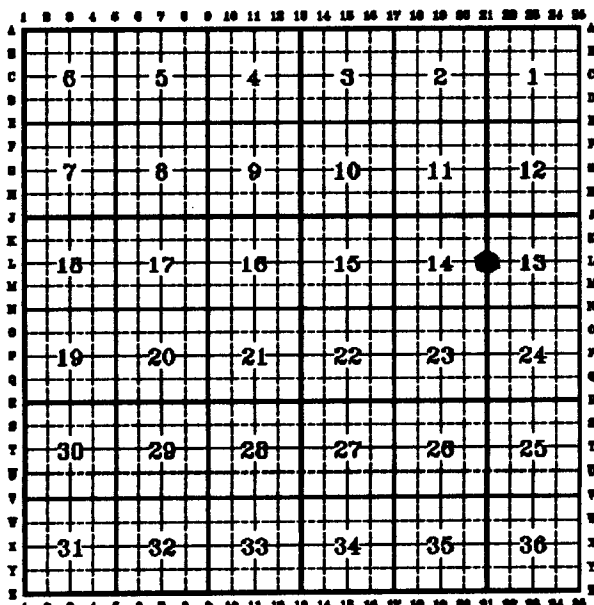


Firm/Agency, Address

Paul A. Reid, A.V.I.P.C.
2035 Westland Road
Cheyenne, WY 82001

Telephone Number:
(307)-634-6017

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

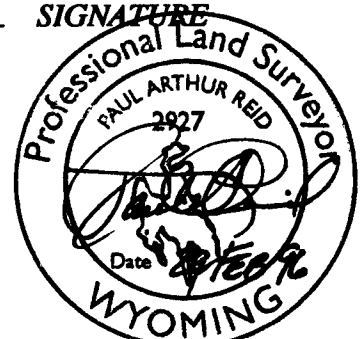

Corner Name: W 1/4 Corner Section: 13 T 15N R 67W; 6TH P.M. Cross-Index No.: L-21

SBRPEPLS/PLSW: March 1994

BASIS OF BEARINGS: BEARINGS ARE GRID AND BASED UPON THE USE OF THE TRIMBLE GPS TOTAL STATION SYSTEM AND WGS 84 DATUM. THE ORIGIN BEING LOCATED @ A LOCAL CONTROL POINT BEING A 1 1/2" ALUMINUM CAP MARKED "CP WARREN" AT 41°15'28.68311"N LATITUDE AND 104°49'23.61968"W LONGITUDE AND BEING APPROXIMATELY 1,320' SOUTH AND 1340' EAST OF THE NW CORNER OF SECTION 19, T. 15N., R. 66W., 6TH P.M.

