


RECEIVED
LARAMIE COUNTY
CHEYENNE, WY.

CERTIFIED LAND CORNER RECORDATION
DEC 23 AM 9 09

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (If known)





Found: Pink granite stone, 6" x 6". Set buried with top about 4" below ground. Stone has "1/4" chiseled on the west face.
 Accessories found - See notes on back.
 GLO: "Set granite boulder 14" x 8" x 5" for 1/4 section corner.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Set: Set driveable aluminum monument, 36" long, with 3" aluminum cap. See Map of Survey filed with Laramie County Clerk for dimensions to adjacent corners. Set easement corner as shown, 5/8" x 24" rebar with 2" aluminum cap.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNER IF DETERMINED IN THIS SURVEY. (May Sketch or Paste Reproduction on Reverse Side.)

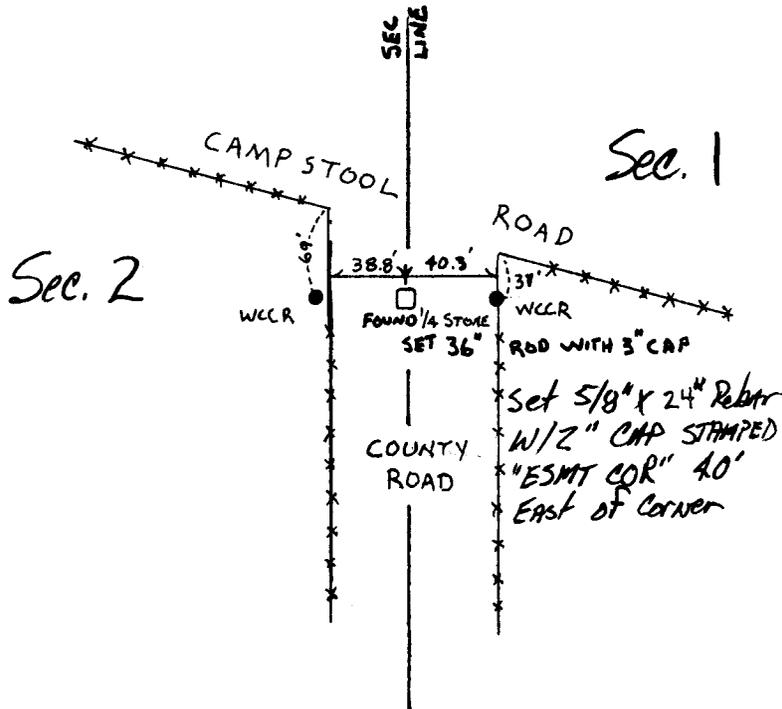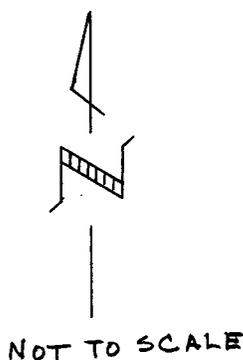

I, BECKY J. BRAMAN certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Becky J. Braman Signature of Surveyor PLS 3881 Registration No.

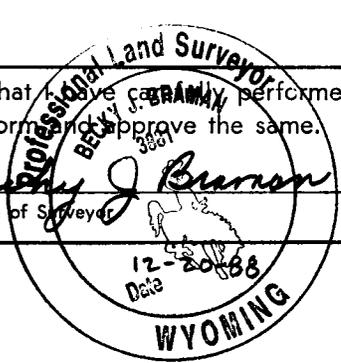

STATE OF WYOMING,
Office of Clerk and Recorder,
County of LARAMIE

This "corner record" was filed for record on the _____ day of _____, 19____, was noted on the cross-index plat and is assigned page No. _____, in book No. _____.

County Official			
Cross Index No. <u>C21</u>	T. <u>13N</u>	R. <u>65W</u>	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.
_____	T. _____	R. _____	Mer.

Witness corner - pink, granite stone lying 40.2 feet west with chiseled "WCCR" on east face. Stone is 8" x 10", protrudes 10" above ground.

Witness corner - whitish, granite stone lying 39.8 feet east with chiseled "WCCR" on east face. Stone is 6" x 10", protrudes 1" above ground.

Note: Laramie County Engineer's office has no specific notes on the witnessing of this road, but other notes, especially the Chalk Bluffs Road notes, show corners set 40 feet to the East and West of North-South road and set at 56.4 feet diagonally from intersections, usually NE and NW.