

State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997, Section 33-29-140, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: U.S. Deputy Surveyor, Henry G. Hay, September, 1870; 80.00 Chains Set Granite Boulder 24 x 14 x 8 for corner to Sec's 15,16,21 and 22.

Found: 20" x 15" x 9" granite stone marked with 3 notches on south edge and 3 notches on east edge just below ground surface in open area.

Set: Due to the settlement of the large stone below the surface I removed the stone and set a No.5 x 40" with 2 1/2" Aluminum Cap appropriately marked at the center position of the stone. Buried the original stone as a memorial east. Raised a small collar of stone around the corner point.


Basis of Bearings and Distances for the ties below were derived with the utilization of the Trimble RTK GPS system and a in the field calibration based upon the City of Cheyenne Control Stations from "PORT" to "CLEAR CREEK" being N15°41'10.1"W @ 12946.09', with the geodetic position of "PORT" being held at NAD 83-94 (HARN) being 41°04' 14.67261" Latitude, 104°52'24.94536" Longitude, 6283.99 Height.

Point Identification	Bearing	Distance	Monumentation
1/4 Cor. 16/15	N00°05'37"W	2638.80'	Original Stone
1/4 Cor. 15/22	N89°15'31"E	2646.89'	Original Stone
1/4 Cor. 21/22	S00°15'29"W	2647.39'	Original Stone
1/4 Cor. 16/21	S89°16'50"W	2655.87'	2 1/2" Al. Cap PLS 2927

Date of Field Work: Sept. 2, 1999

Office Reference: A.V.I. Job No. 2157

CROSS INDEX DIAGRAM

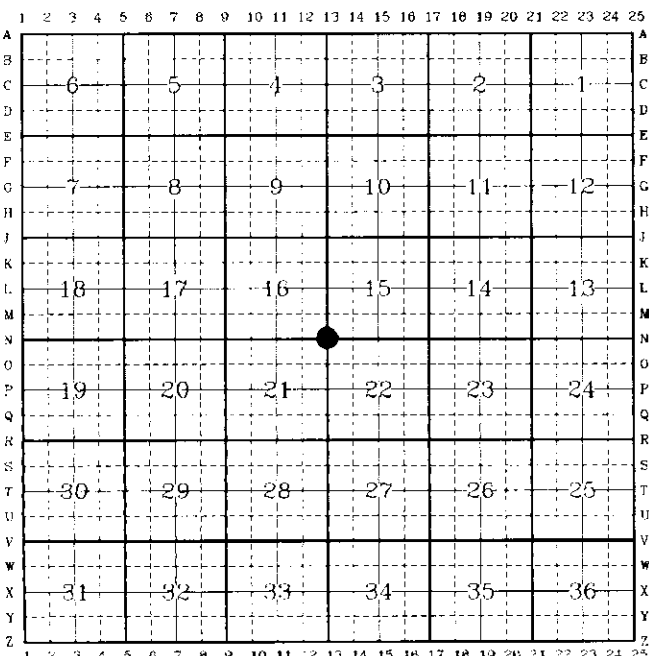


Firm/Agency, Address
 Paul A. Reid, P.L.S.
 A.V.I., p.c.
 2035 Westland Road
 Cheyenne, WY 82001

Telephone Number:
 (307) 637-6017

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE

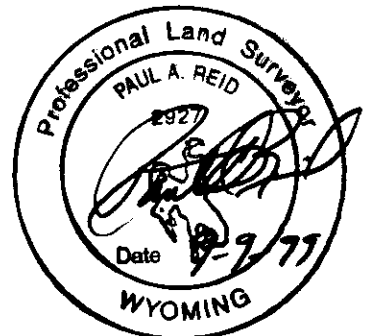

RECORDED 9/09/1999 AT 4:04 PM REC# 260077 BK# 1532 PG# 1058
 DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1

Corner Name: SW Cor
 SBRPEPLS/PLSW: March 1994

Section: 15

T.13N., R.67W.; 6th P.M. Cross-Index No.: N-13