State of Wyoming Corner Record


(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1997 Section 33—29—140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

U.S.G.L.O. 1871 Record: Set a granite boulder 19x10x6 for quarter section corner. No evidence of monument or accessories found in place. Corner is lost.

Establish corner position by single proportion from the set monuments (LS 6098) for the double proportioned southeast and northeast corners of Section 26. Set a 2-1/2" Aluminum Cap on a 30" no. 6 rebar 0.1' above ground and inscribed as shown below.

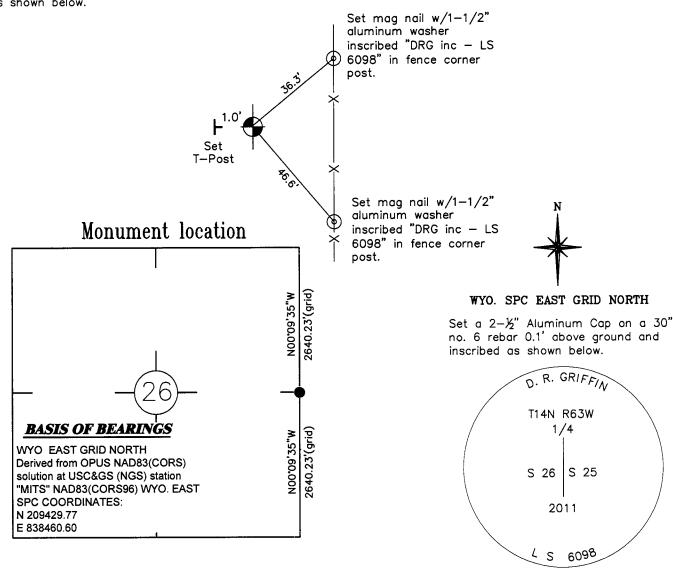

Monument Inscripition

Date of Field Work: 6/12/11

Office Reference: 18661

Cross Index Plat

Firm/Agency, Address


RONALD C. RENNKE D. R. GRIFFIN & ASSOCIATES

1414 ELK STREET ROCK SPRINGS, WYOMING 82901

Telephone Number: (307) 362-5028

This corner record was prepared by me or under my direction and supervision.

SEAL & SIGNATURE



16 AM REC# 573781 BK# 2231 PG# 465 RECORDED 8/09/2011 AT 10:16 AM REC# DEBRA K. LATHROP, CLERK OF LARAMIE CO

Corner Name East 1/4 Corner Section 26, T 14 N, R 63 W, 6th P.M.

County: Laramie, Wyoming

SBRPEPLS/PLSW: March 1994; PLSW January 1998

Cross-Index No.: T-21