


Wyoming Certified Land Corner Recordation Certificate

This form is to be completed in accordance with W.S. 36-11-101, printed in black ink or typed, and shall be for one individual corner.

Describe below, or show in sketch attached to this form, the corner evidence found. Include condition and type of monument, accessories and ties. Describe any maintenance or rehabilitation performed. In the circle to the right, show monument inscription. If monument is determined lost or obliterated, restate the GLO or BLM original field note record; describe or show the procedure used to reestablish the corner and all data as above for a found monument.

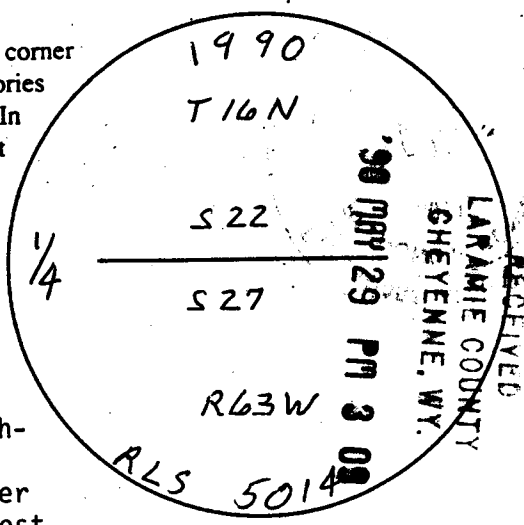

070681

Field Date 4-11-90 Office Reference _____


After extensive field search, it was determined the best evidence for the re-establishment of the corner was the straight-line proportion between the found southeast corner of Section 22 and the re-established southwest corner of Section 22.

Monument Inscription

GLO notes attached.

Monument set: #5 rebar with 2" aluminum cap stamped as shown; 6" below gravel road.

References: P-K nails with 1-1/2" galvanized washers stamped "5014".

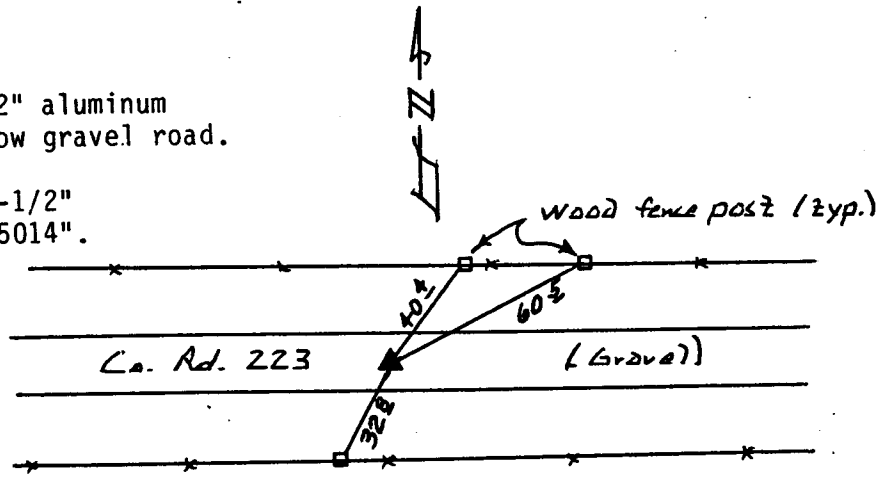

State of Wyoming
Office of County Clerk
County of Laramie

This Certified Land Corner Recordation Certificate was filed for record on the _____ day of _____, 19 __, in Book No. T _____, R _____, on Alpha-Numeric coordinates R-15 and was noted on the Cross Index Plat.

County Clerk

Corner Type: Aliquot Corner Other

Section(s) 22 Meridian G 11

Corner Name Quartz Township 16 N Range 63 W Page _____

Sheet 1 of 3

**Directions for using the
Cross Index Plat**

Section, quarter and sixteenth corners will be marked with a dot at the corner location. The alpha-numeric coordinate number is then determined for the intersection of the two lines. A corner that applies to two or more townships shall be filed under all that apply by the use of photo copies.

Closing corners will be indexed under the township in which they control ownership. For 1/64, 1/256, 1/1024 and non-aliquot corners lying between grid designations, mark the appropriate grid area with a dot and use the index code to the north and west (local systems may be used if the method is approved by the County Surveyor or Clerk and a written description of its use is filed in the front of each book of certificates).

Cross Index Plat

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	
A																									
B																									
C	6				5				4				3					2							
D																									
E																									
F																									
G	7				6				5				10					11							
H																									
J																									
K																									
L	18				17				16				15					14							
M																									
N																									
O																									
P	19				20				21				22					23							
Q																									
R																									
S																									
T	30				29				28				27					26							
U																									
V																									
W																									
X	31				32				33				34					35							
Y																									
Z																									

State Plane Coordinates (optional)

Zone W WC EC E feet/meters

NAD 1927 NGVD 1929 NAD 1983 NAVD 1988

North (Y) = _____ East (X) = _____ EL = _____

Latitude _____ Longitude _____

Scale Factor _____ Geoid Height _____

Certification

I, Raymond E. Connin, Wyoming PLS-RE 5014 certify that I, or others under my supervision, have performed the work as described above and completed this form.

Company or Agency Hall & Walters, Inc.

Mailing Address _____

Street Address 873 North Cleveland

City, State, ZIP Loveland, CO 80537

Telephone, FAX 303-663-1177



Raymond E. Connin
Signature, Seal, and Date

144

Shewshup 16 North Range 63 West

Chains

~~for corner to sections 22, 23, 24, 25
S 89° 30' E 100 links~~

~~East on a Revision line~~

~~between sections 22 & 23~~

~~variation 15° 10' E~~

40.00 ~~Set a temporary 1/4 section corner~~

19.55 ~~intersect at 7, 8 line 70 links~~

~~South of corner to sections 22, 23~~

~~26 & 27 from which corner 3 run~~

~~S 89° 30' W on a true line~~

~~between sections 22 & 23~~

39.911 ~~Set a granite corner 15 x 7 x 6~~

~~for quarter section corner~~

~~Corner to sections 21, 22, 23 & 24~~

~~and setting said 2^d rate~~

~~graves good~~

19.55

145

Shewshup 16 North Range 63 West

Chains

~~North between sections 21 & 22
variation 15° 10' E~~

40.60 ~~Set a granite corner 16 x 10 x 6~~

~~for quarter section corner~~

80.00 ~~Set a granite corner 18 x 10 x 6~~

~~for corner to sections 15, 16, 21 & 22~~

~~and setting said 2^d rate~~

~~graves good~~

~~East on a Revision line~~

~~between sections 15 & 22~~

~~variation 15° 10' E~~

40.00 ~~Set temporary 1/4 section corner~~

19.51 ~~intersect at 7, 8 line 110 links~~

~~South of corner to sections 14, 15~~

~~22 & 23 from which corner~~

~~3 run~~

~~S 89° 13' W on a true line~~

~~between sections 15 & 22~~

39.151 ~~Set a granite corner 15 x 10 x 6~~

