State of Wyoming Corner Record

(In compliance with the *CORNER PERPETUATION AND FILING ACT*, Wyoming Statutes, 1997 Section 33-29-140 et. seq., and the Rules and Regulations of the Board of Professional Engineers and Professional Land Surveyors)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. RECORD:
VA.16°E
4th STANDARD PARALLEL
FROM THE CORNER TO SECTIONS 33 AND 34 RAN ON A TRUE LINE ALONG THE SOUTH BOUNDARY OF SECTION 34, T17N., R64W. 40.00 CHAINS AND SET A LIMESTONE 15"X12"X4" FOR 1/4 SECTION CORNER.

N
N.T.S.

AT THE CORNER:
FOUND NOTHING
PLACED A 2 1/2" ALUMINUM CAP ON A 5/8" X 24" REBAR FLUSH WITH THE GROUND STAMPED AS SHOWN.

CORNER WAS RESET BY SINGLE PROPORTION METHOD

NOTE:
ALL TIES ARE P.K. NAILS SET IN CEDAR FENCE POSTS

NOTE:
ALL FENCES ARE BARBED WIRE

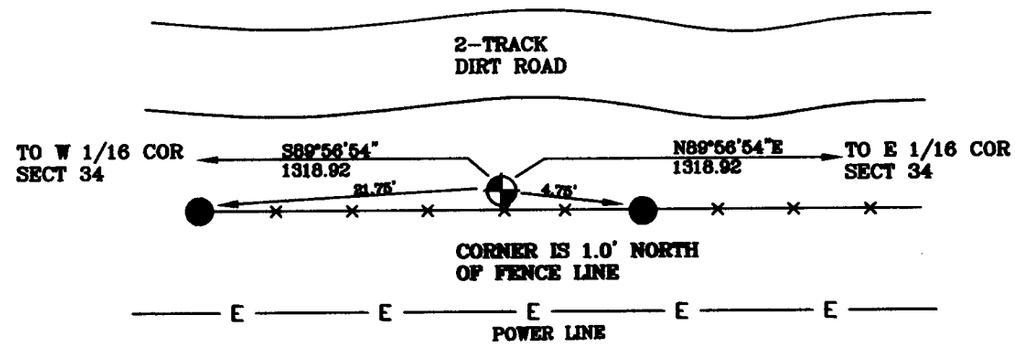

Date of Field Work: 10/15/06 Office Reference: HUTTON

Cross Index Plat

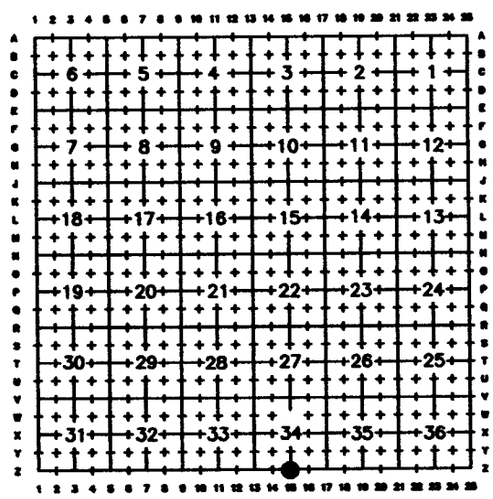

Firm/Agency, Address
Western R&D, Ltd.
5809 Yellowstone Rd., Suite B
Cheyenne, Wyoming 82009

Telephone Number: (307) 632-5656

This corner record was prepared by me or under my direction and supervision.
SEAL & SIGNATURE

● Denotes Monument Set

WESTERN R&D
T 17 N
R 64 W
1/4 S34 | S34
S3
T 16 N
2006
PELS 2613

Professional Engineer (Civil) & Land Surveyor
ROGER H. KRUM
2613
Date
WYOMING

Corner Name SOUTH 1/4 CORNER Section 34, T 17 N, R 64 W, 6th P.M.
County: LARAMIE Wyoming

Cross-Index No.: Z-15

SBRPEPLS/PLSW: March 1994; PLSW January 1998

RECORDED 2/06/2008 AT 2:00 PM REC# 492975 BK# 2044 PG# 149
DEBRA K. LATHROP, CLERK OF LARAMIE COUNTY, WY PAGE 1 OF 1