

### State of Wyoming Corner Record

(In compliance with the CORNER PERPETUATION AND FILING ACT, Wyoming Statutes, 1977, Section 36-11-101, et. seq., and the Rules and Regulations of the Board of Registration for Professional Engineers and Professional Land Surveyors.)

Reverse side of this form may be used if more space is needed.

Record of original survey and citation of source of historical information (if corner is lost or obliterated). Description of corner monumentation evidence found and/or monument and accessories established to perpetuate the location of this corner. Sketch of relative location of monument, accessories, and reference points with course and distance to adjacent corner(s) (if determined in this survey). Method and rationale for reestablishment of lost or obliterated corner.

G.L.O. Record: Henry G. Hay, U.S. Deputy Surveyor, Nov.6-12, 1873. Set a limestone, 15 x 12 x 4, 10 inches deep marked with 2 notches on the East side, 4 notches on the West, side and "S.C." on the north side for corner to Sec. 34 and 35 on the 4th Standard Parallel November 6, 1873.

Found: After a diligent search with a spade shovel, nothing.

Set: At proportionate distance between found and re-established corners east and west, I set a No. 6 x 30" rebar with 3 1/4" domed aluminum cap marked as noted below on the 4th Standard Parallel. Set a 5' steel fence post 1' south as a witness and raised a mound of white limestone west.

CAP MARKINGS

A.V.I. P.C.  
SC  
T.17N.R.60W.

S34 | S35

1995  
P.L.S. 2927

LARAMIE COUNTY CLERK  
CHEYENNE, WY.

'95 JUN 15 AM 10 16

163686

SEE ALSO RECORD OF SURVEY TO BE FILED IN LARAMIE COUNTY CLERKS OFFICE.


BOOK 1400

0476

Date of Field Work: APRIL-DEC. 1994

Office Reference: A.V.I. Project No. 2-1847.94

#### CROSS INDEX DIAGRAM

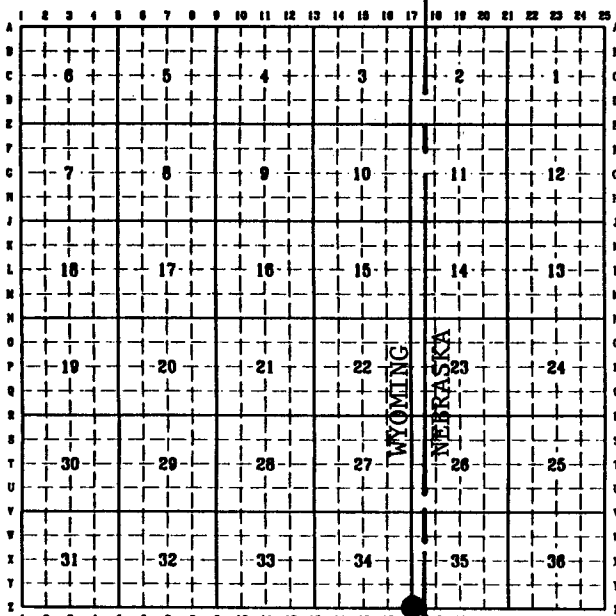


Firm/Agency, Address

This corner record was prepared by me or under my direction and supervision.

PREPARED BY:

Paul A. Reid, P.L.S.  
A.V.I., P.C.  
2035 Westland Road  
Cheyenne, WY 82001  
(307) 637-6017

SEAL & SIGNATURE

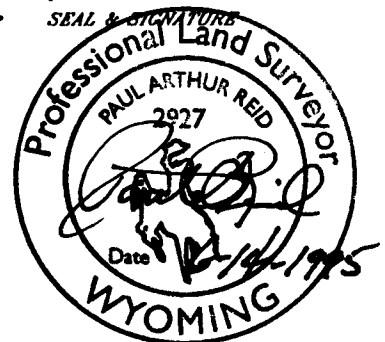

Corner Name: SE Corner

Section: 34 T.17N. R.60W.; 6th P.M. Cross-Index No.: Z-17